

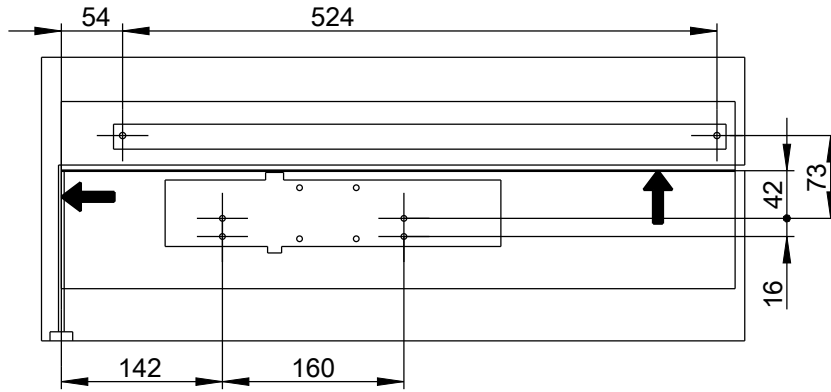



1a

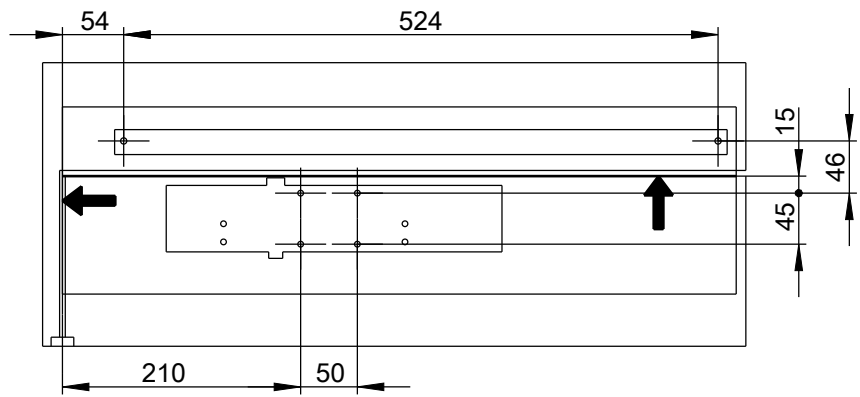

1b





K-17975 en option
opcional




K-19640 en option
opcional

2

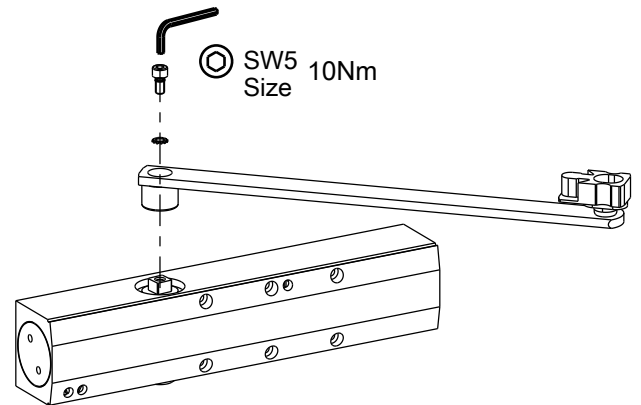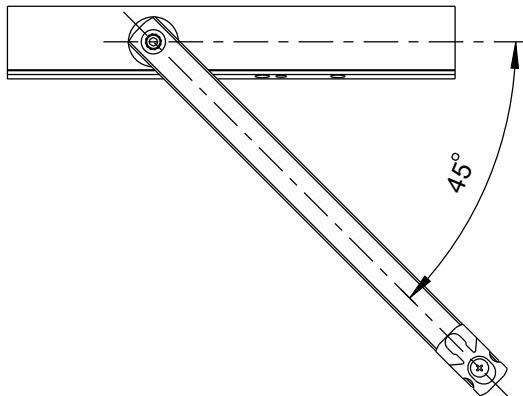

3

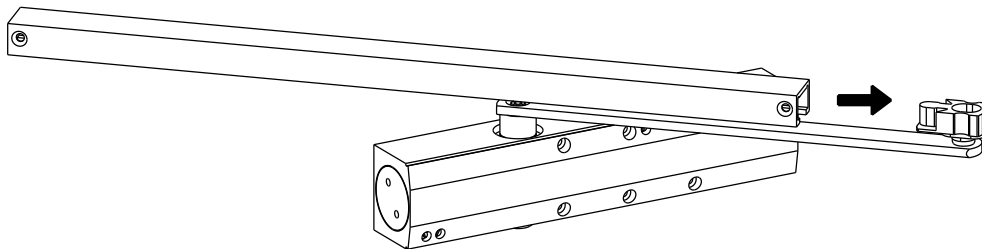

Gretsch-Unitas GmbH
Baubeschläge
Johann-Maus-Str. 3
D-71254 Ditzingen

18

Description:

OTS 634 montage standard coté paumelles, DIN gauche K-17523

OTS 634 Montaje normal lado bisagras, DIN izda. K-17523

0432-CPR-00184-08	EN 1154:1996/A1:2002/AC:2006	4	8	4	2	1	1	3
Substance:-----								

Sprache


EN, FR, ES

V8




Date	Change No.	Sig	Ver.	Replacement for	Revision:	Iteration:	Level:	Scale	Drawing No.	Size	Sheet
09.03.2020	G37641	Se	Wi	--	8	2	Released	%	0-44860-PL-0-FR	A4	1/12


4a

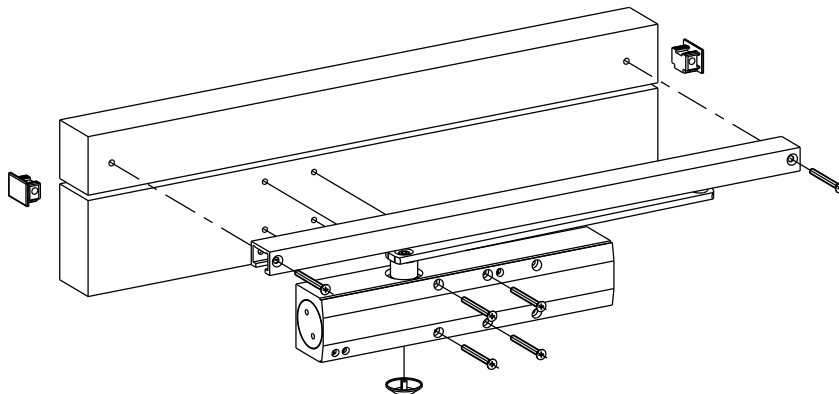


4b

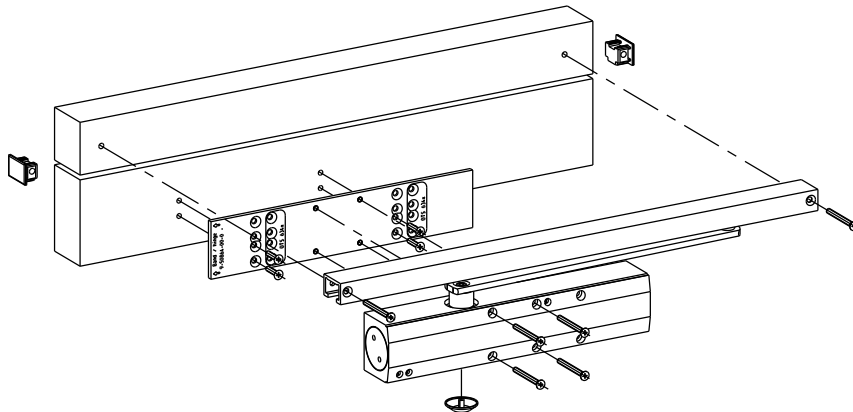


5

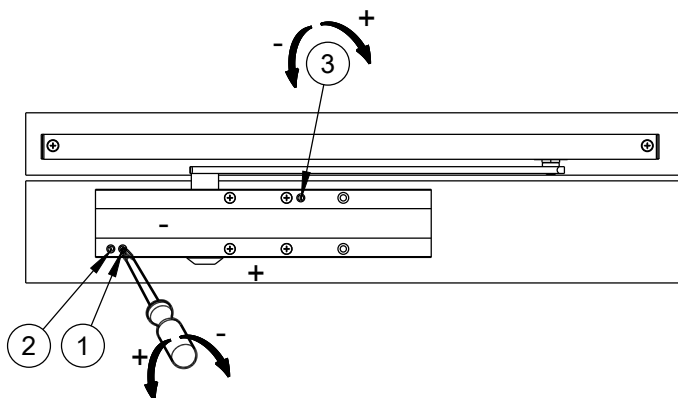

- ① Vitesse de fermeture
Velocidad de cierre
- ② À-coup final
Golpe final
- ③ Freinage à l'ouverture
Frenado de apertura

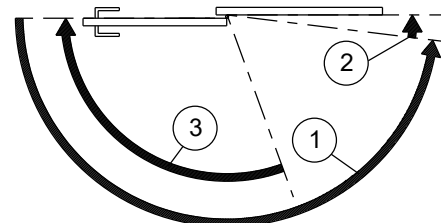


6

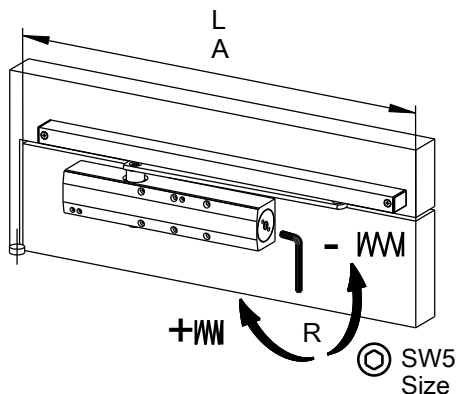

Force de fermeture Fuerza de cierre		
EN	$\leq \frac{L}{A}$	R
2	850mm	- 10
3	950mm	- 8
4	1100mm	0


7

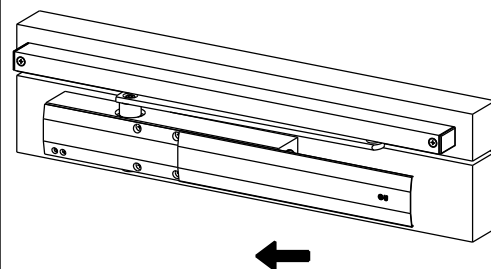


Description:

OTS 634 montage standard coté paumelles, DIN gauche K-17523



OTS 634 Montaje normal lado bisagras, DIN izda. K-17523

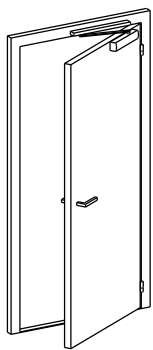


1a

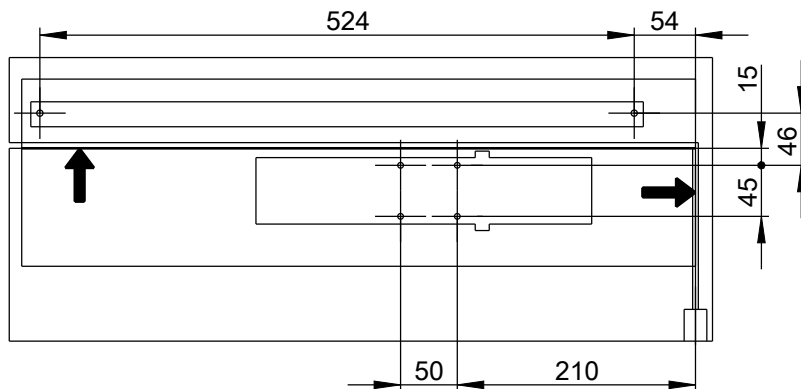

1b


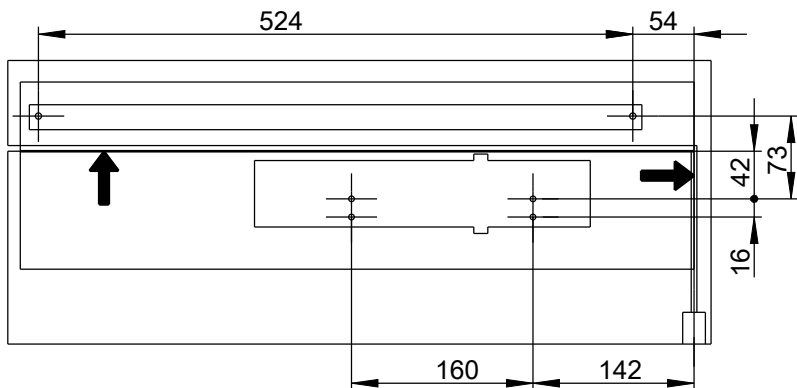


K-17975 en option
opcional




K-19640 en option
opcional

2

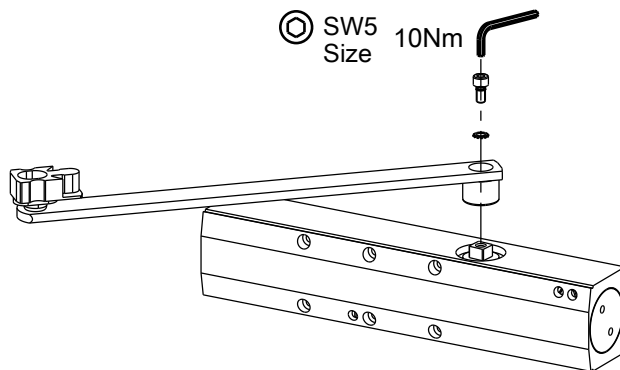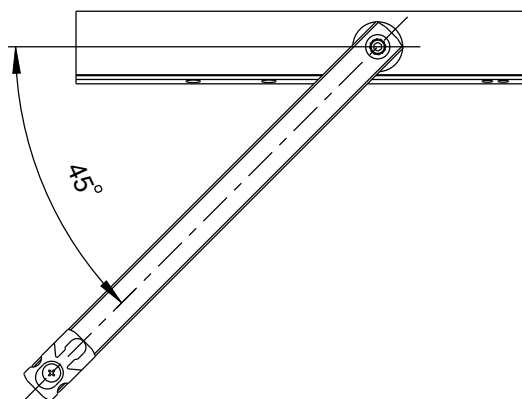

3

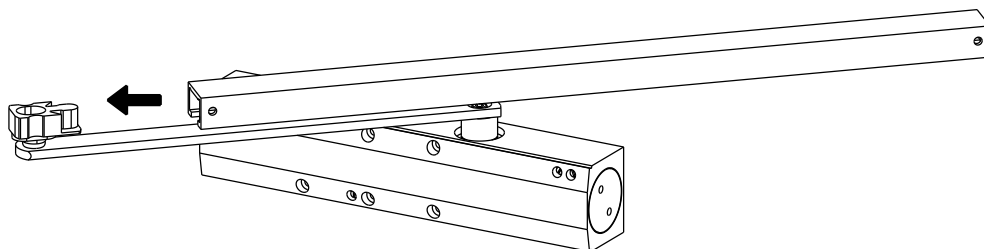

Description:

OTS 634 montage standard coté paumelles, DIN droite K-17523


OTS 634 montaje normal lado bisagras, DIN dcha. K-17523

	Gretsch-Unitas GmbH Baubeschläge Johann-Maus-Str. 3 D-71254 Ditzingen			18			
032-CPR- 0184-08	EN 1154:1996/A1:2002/ AC:2006	4	8	4 2	1	1	3
Substance:-----							


Sprache
EN, FR, ES

V8


GU	Date 09.03.2020	Change No. G37641	Sig Se	Ver. Wi	Replacement for --	Revision: 8	Iteration: 2	Level: Released	Scale %	Drawing No. 0-44860-PL-0-FR	Size A4	Sheet 3/12
-----------	--------------------	----------------------	-----------	------------	-----------------------	----------------	-----------------	--------------------	------------	---------------------------------------	------------	---------------

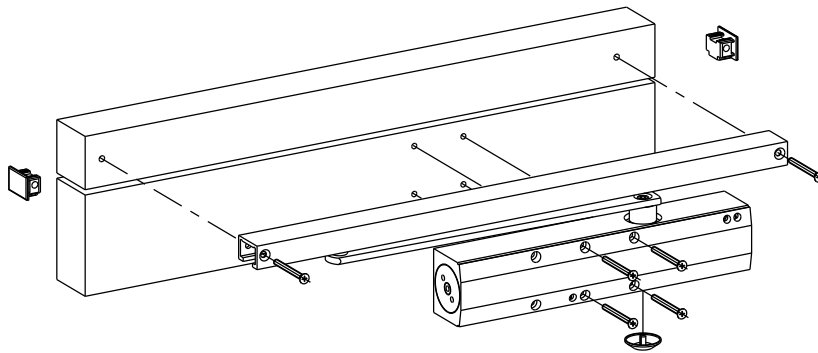


4a

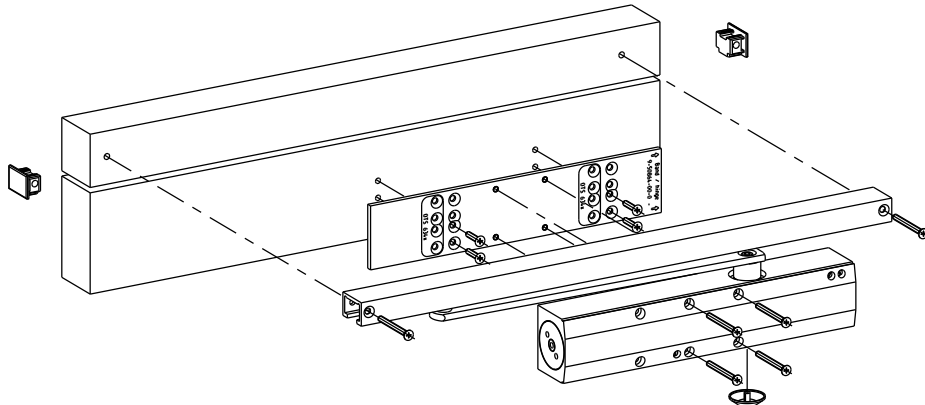


4b

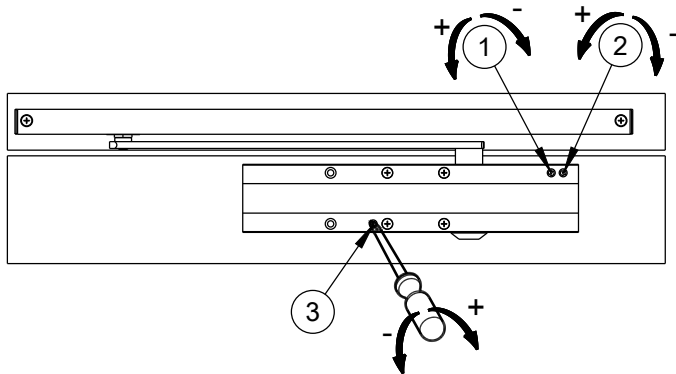

- ① Vitesse de fermeture
Velocidad de cierre
- ② À-coup final
Golpe final
- ③ Freinage à l'ouverture
Frenado de apertura

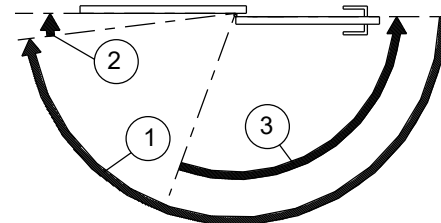


5

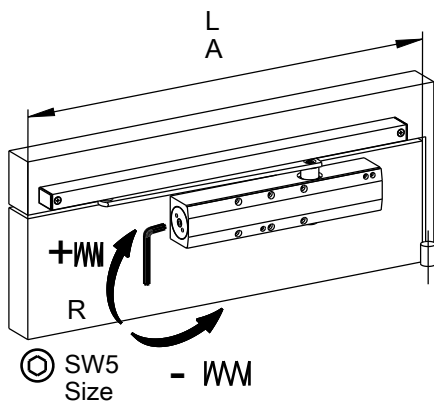

Force de fermeture Fuerza de cierre			
EN	$\leq \frac{L}{A}$	R	
2	850mm	- 10	
3	950mm	- 8	
4	1100mm	0	

6

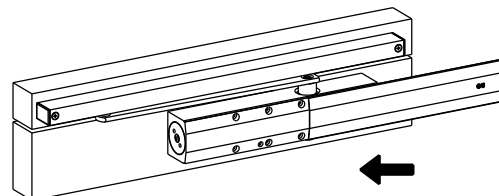


7




Description:

OTS 634 montage standard coté paumelles, DIN droite K-17523

OTS 634 montaje normal lado bisagras, DIN dcha. K-17523




1a

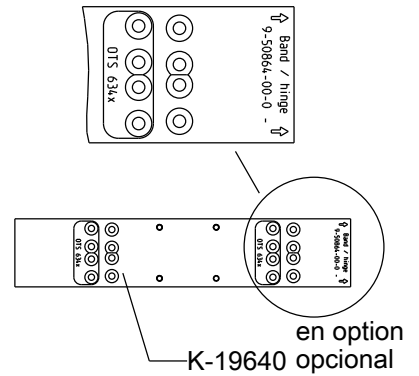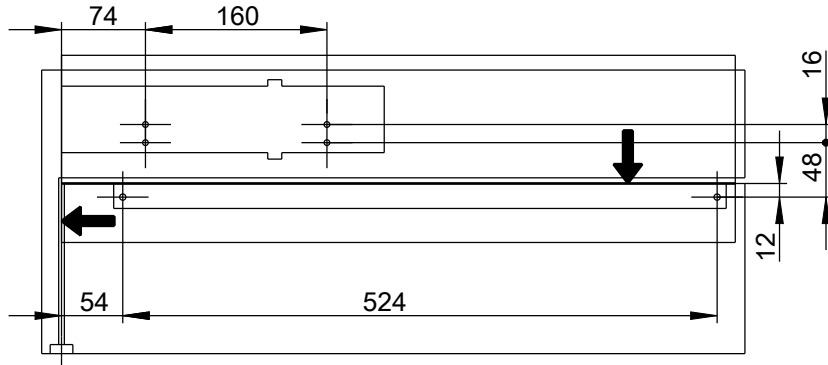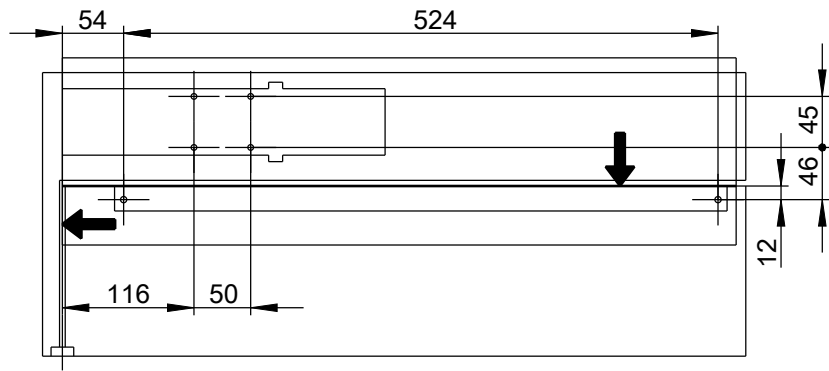


1b

2

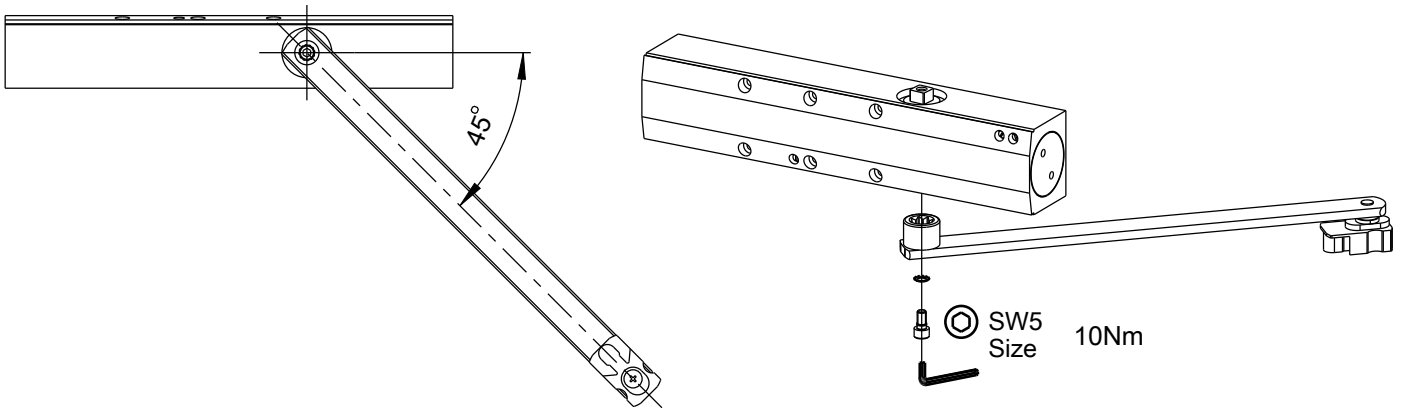

3

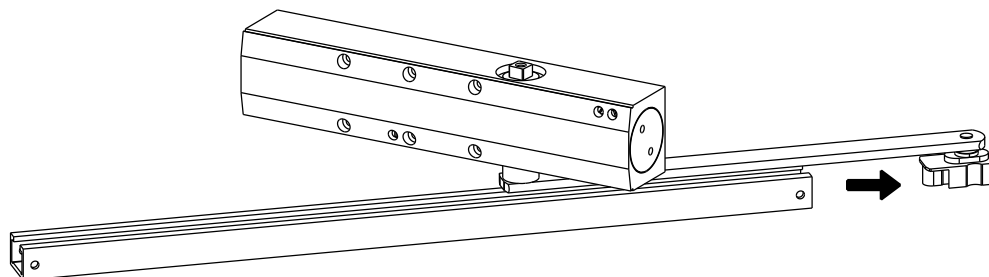


CE	Gretsch-Unitas GmbH Baubeschläge Johann-Maus-Str. 3 D-71254 Ditzingen		18	
	0432-CPR-00184-08	EN 1154:1996/A1:2002/AC:2006	4	8
Substance:-----			2	1
			1	3


Description:
OTS 634 montage inversé côté paumelles, DIN gauche K-17523

OTS 634 montaje invertido lado bisagras, DIN izda K-17523


GU	Date	Change No.	Sig	Ver.	Replacement for	Revision:	Iteration:	Level:	Scale	Drawing No.	Size	Sheet
	09.03.2020	G37641	Se	Wi	--	8	2	Released	%	0-44860-PL-0-FR	A4	5/12

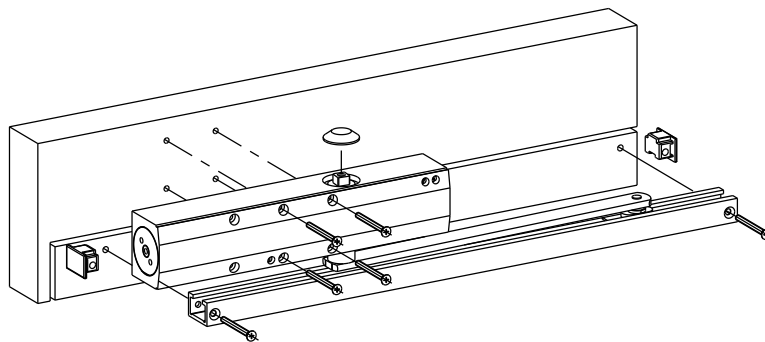


4a

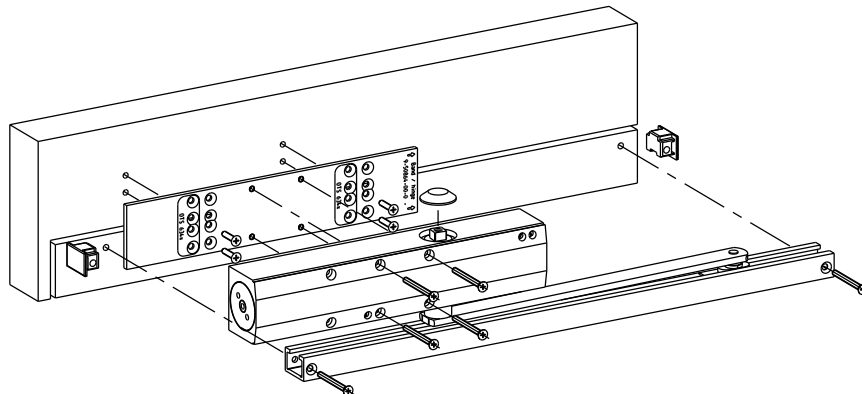


4b

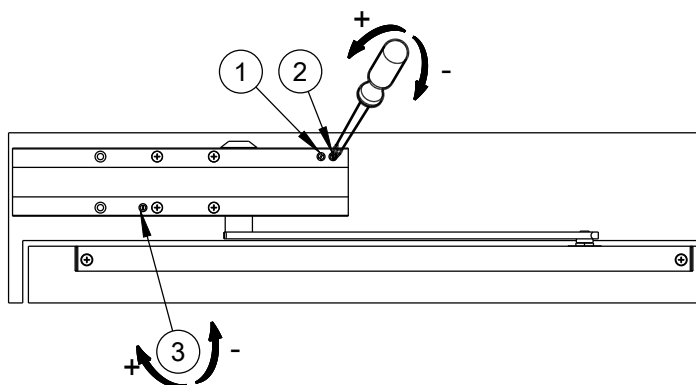


5

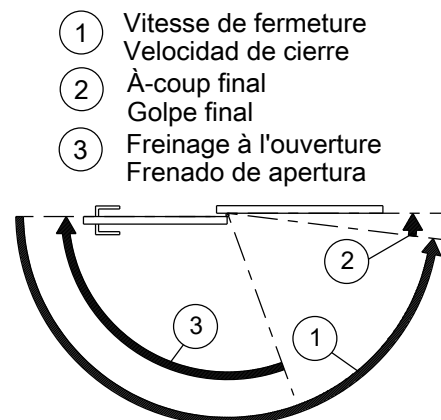

6

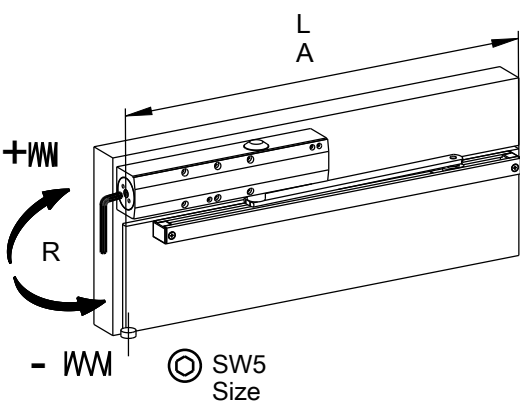


Force de fermeture Fuerza de cierre		
EN	$\leq \frac{L}{A}$	$\curvearrowright$ R
2	850mm	- 10
3	950mm	- 8
4	1100mm	0

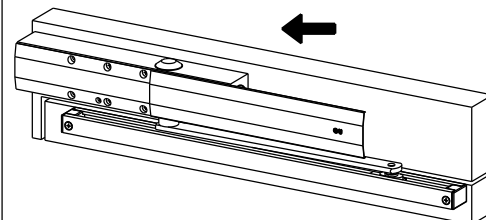


7

Description:
OTS 634 montage inversé côté paumelles, DIN gauche K-17523



OTS 634 montaje invertido lado bisagras, DIN izda K-17523





1a

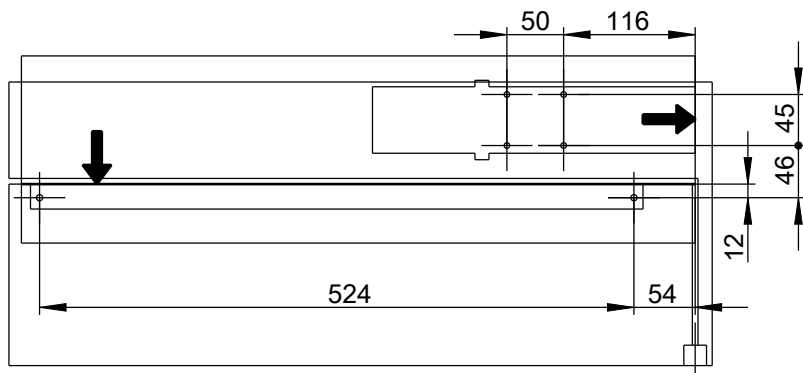


1b

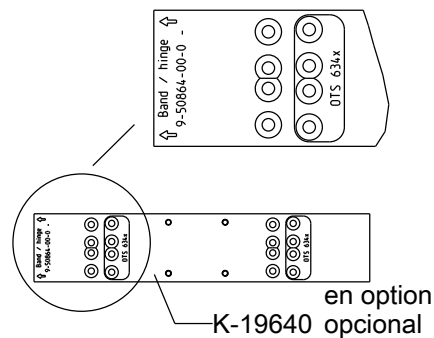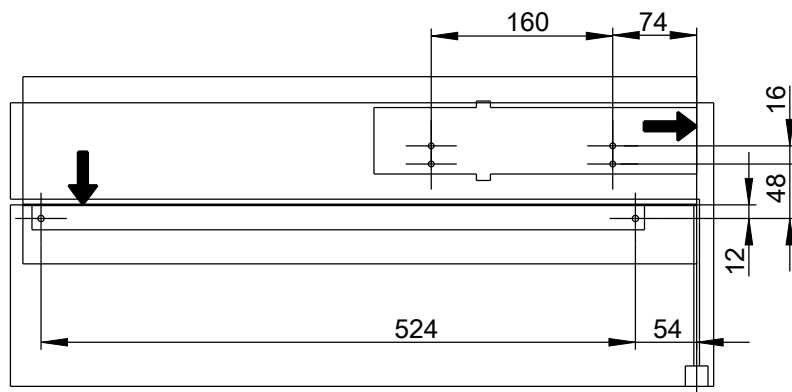

2

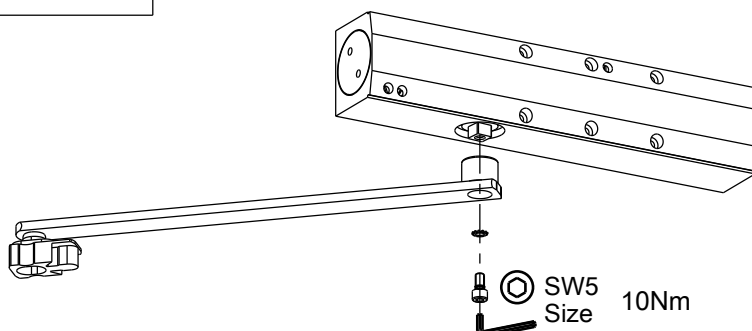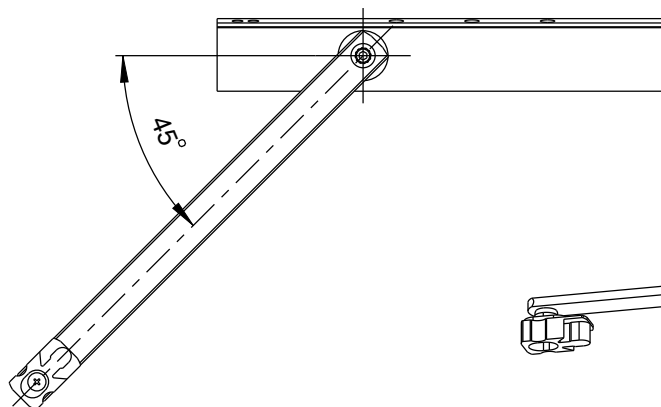

3

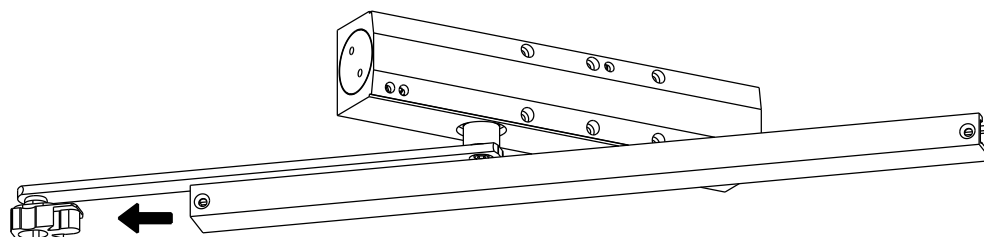

Description:

OTS 634 montage inversé côté paumelles, DIN droite K-17523

OTS 634 montaje invertido lado bisagras, DIN dcha. K-17523



Gretsch-Unitas GmbH
Baubeschläge
Johann-Maus-Str. 3
D-71254 Ditzingen

18

0432-CPR-00184-08	EN 1154:1996/A1:2002/AC:2006	4	8	4	2	1	1	3
Substance:-----								

Sprache


EN, FR, ES

V8




Date	Change No.	Sig	Ver.	Replacement for	Revision:	Iteration:	Level:
09.03.2020	G37641	Se	Wi	--	8	2	Released


Scale	Drawing No.	Size	Sheet
%	0-44860-PL-0-FR	A4	7/12

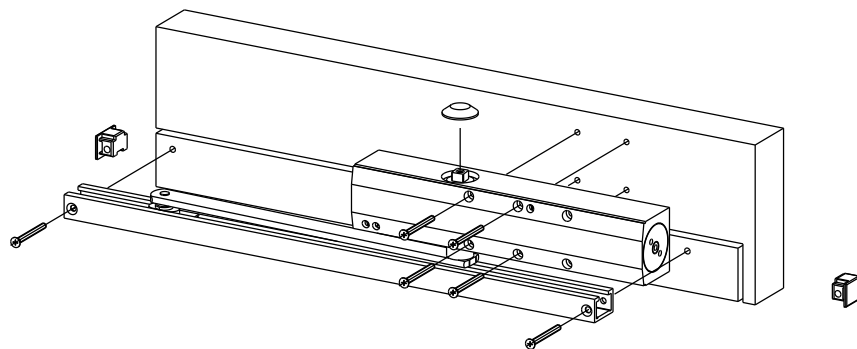



4a

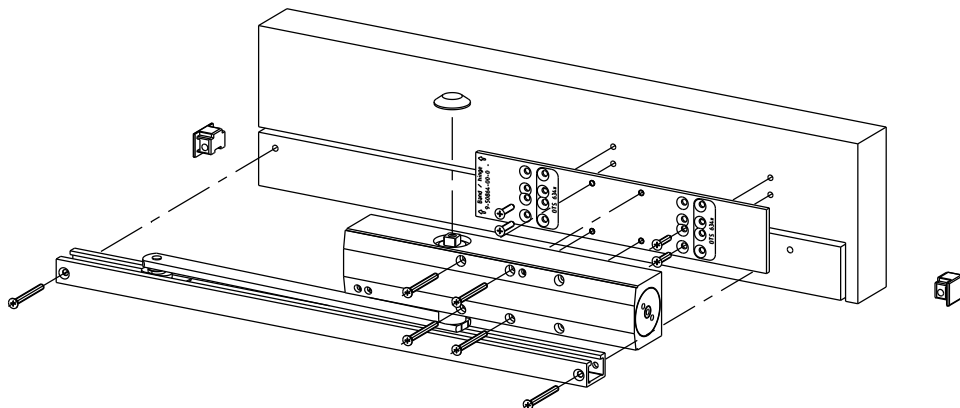


4b

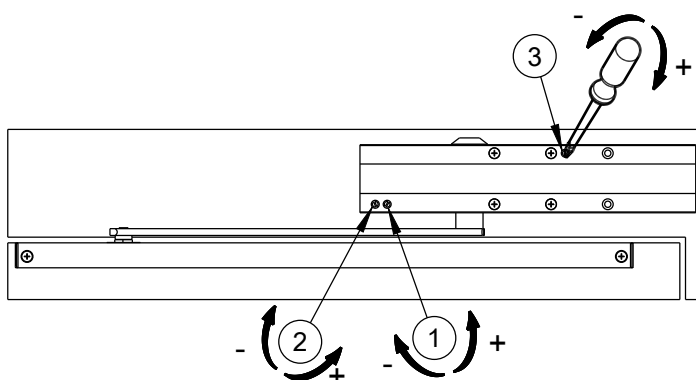

5

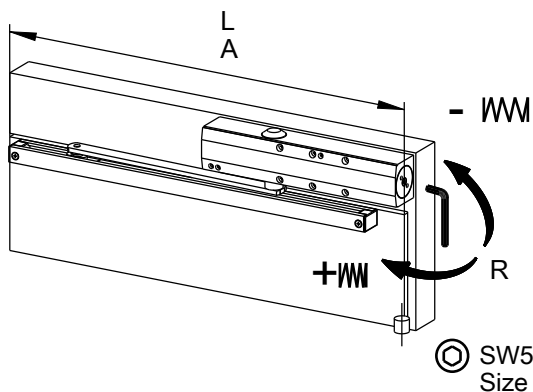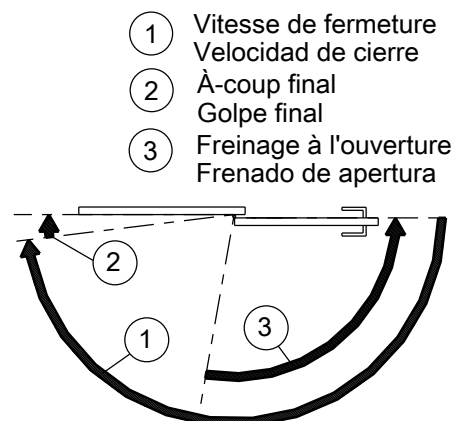

6

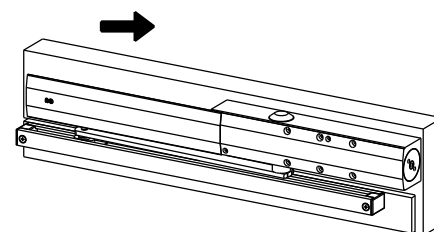


7




Description:

OTS 634 montage inversé côté paumelles, DIN droite K-17523


OTS 634 montaje invertido lado bisagras, DIN dcha. K-17523



1a

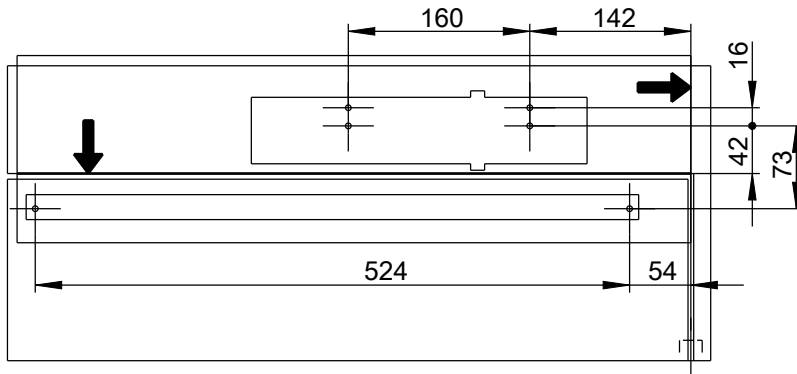
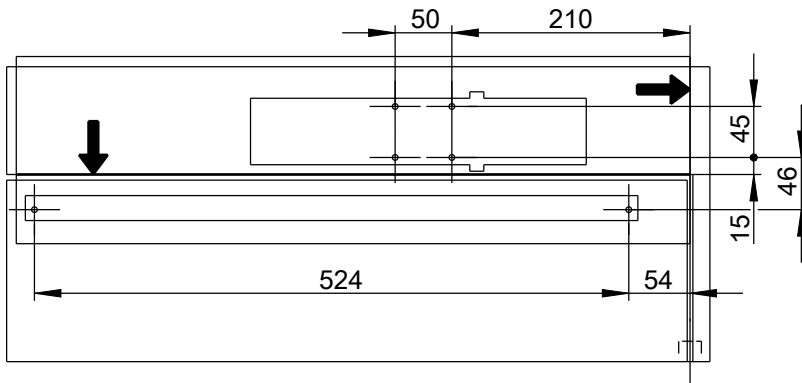


K-17975 en option
opcional




K-19640 en option
opcional

1b

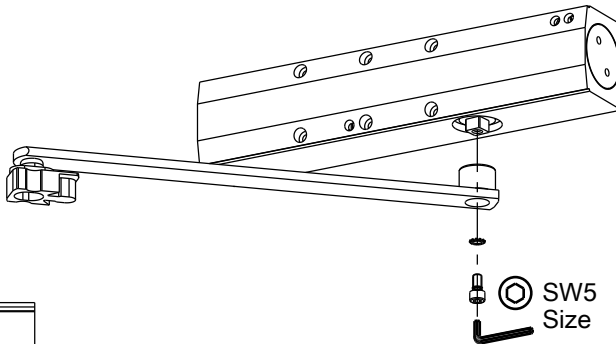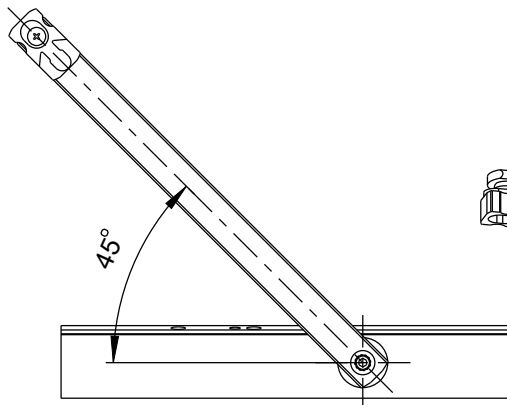

SW5
Size 10Nm

2

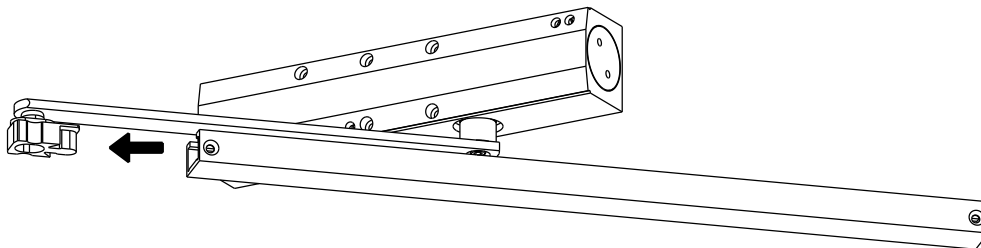

3

Description:

OTS 634 montage inversé côté opposé aux paumelles, DIN gauche K-17523

OTS 634 montaje invertido lado contrario a bisagras, DIN izda. K-17523


CE	Gretsch-Unitas GmbH Baubeschläge Johann-Maus-Str. 3 D-71254 Ditzingen		18					
	0432-CPR- 00184-08	EN 1154:1996/A1:2002/ AC:2006	3	8	4 2	1	1	3
Substance:-----								

Sprache
EN, FR, ES


V8

GU	Date 09.03.2020	Change No. G37641	Sig Se	Ver. Wi	Replacement for --	Revision: 8	Iteration: 2	Level: Released	Scale %	Drawing No. 0-44860-PL-0-FR	Size A4	Sheet 9/12
-----------	--------------------	----------------------	-----------	------------	-----------------------	----------------	-----------------	--------------------	------------	---------------------------------------	------------	---------------


4a

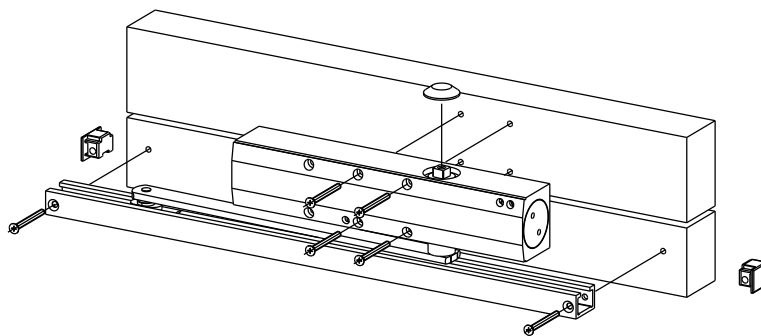


4b

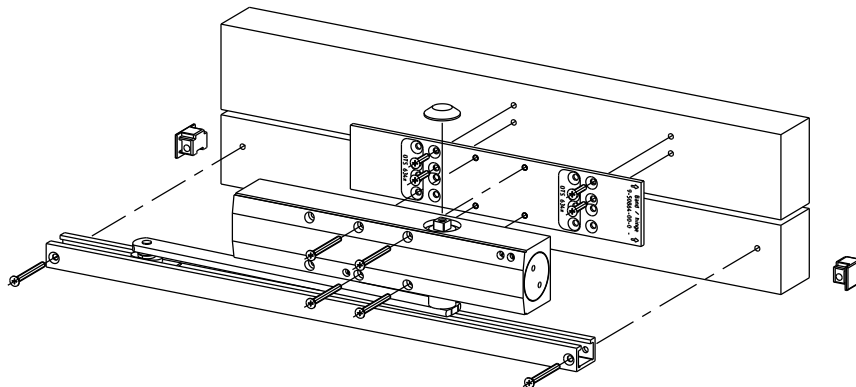

5

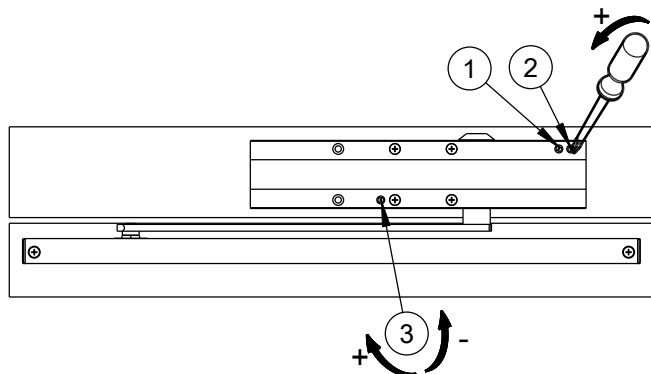


- ① Vitesse de fermeture
Velocidad de cierre
- ② À-coup final
Golpe final
- ③ Freinage à l'ouverture
Frenado de apertura




Utiliser une butée de porte (non fourni), max. 105°
Utilizar un tope de puerta (no incluido), máx. 105°

6

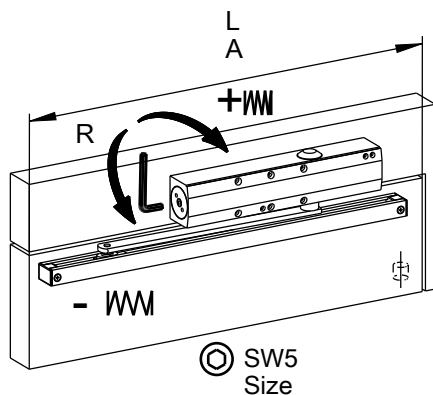

Force de fermeture Fuerza de cierre		
EN	$\leq \frac{L}{A}$	$\curvearrowright R$
2	850mm	- 10
3	950mm	- 8
4	1100mm	0


7

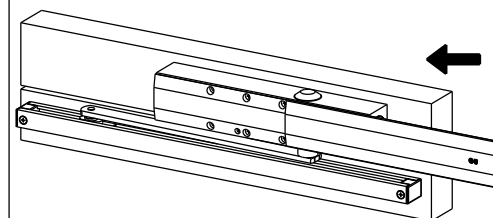


Description:

OTS 634 montage inversé côté opposé aux paumelles, DIN gauche K-17523



OTS 634 montaje invertido lado contrario a bisagras, DIN izda. K-17523




1a

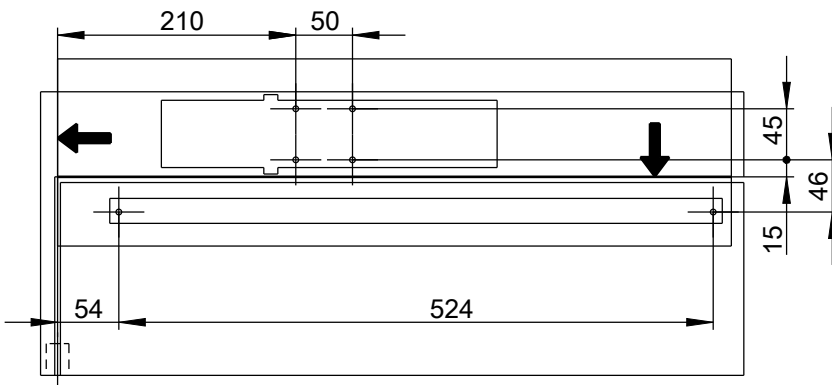

1b


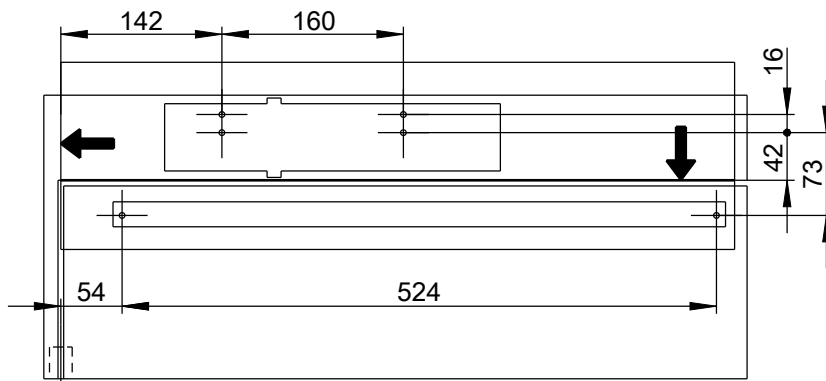


K-17975 en option
opcional




K-19640 en option
opcional

2

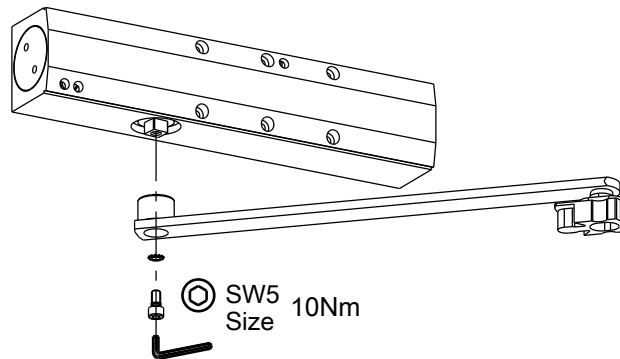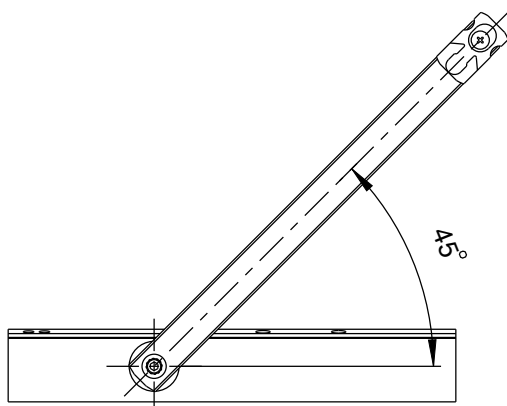

3

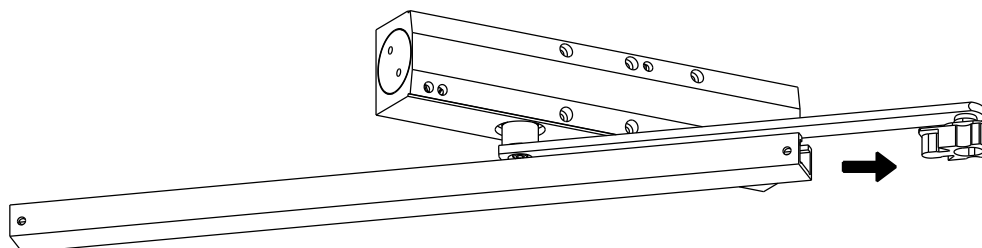

Gretsch-Unitas GmbH
Baubeschläge
Johann-Maus-Str. 3
D-71254 Ditzingen

18

Description:

OTS 634 montage inversé côté opposé aux paumelles, DIN droite K-17523

OTS 634 montaje invertido lado contrario a bisagras, DIN dcha. K-17523

0432-CPR-
00184-08

EN 1154:1996/A1:2002/
AC:2006

3 8 4 2 1 1 3

Substance:-----

Sprache

EN, FR, ES

V8




Date	Change No.	Sig	Ver.	Replacement for
09.03.2020	G37641	Se	Wi	--

Revision:	Iteration:	Level:
8	2	Released


Scale
%

Drawing No.
0-44860-PL-0-FR


Size	Sheet
A4	11/12

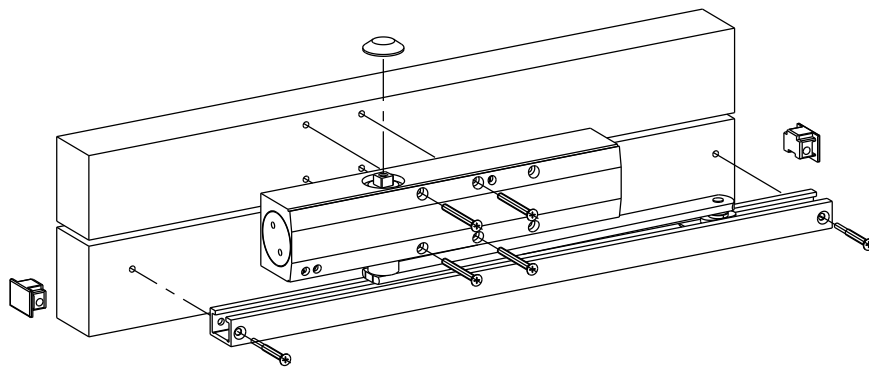



4a

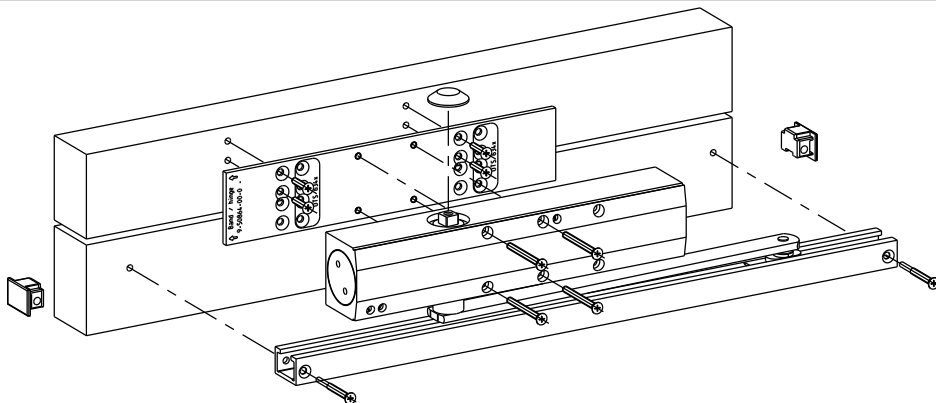

4b

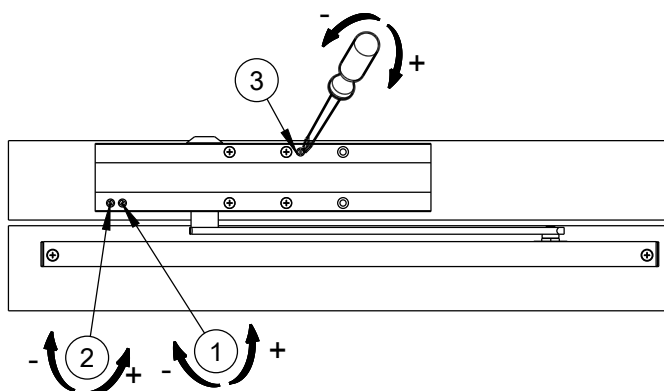


5

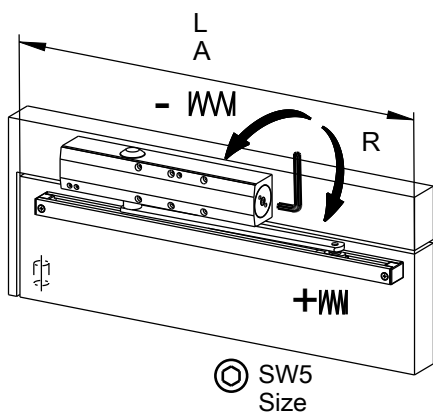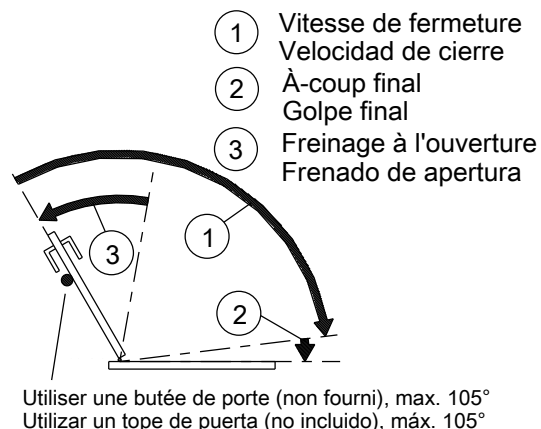

6

Force de fermeture Fuerza de cierre		
EN	≤ L A	R
2	850mm	- 10
3	950mm	- 8
4	1100mm	0

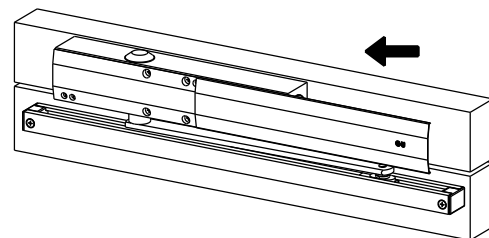

7

Description:

OTS 634 montage inversé côté opposé aux paumelles, DIN droite K-17523

OTS 634 montaje invertido lado contrario a bisagras, DIN dcha. K-17523